



®


**PACKAGING**

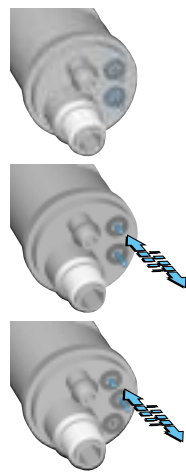

	ERGOPLUS 25	m	Liner	Adaptor	Trigger
EURO FIXED PINS	MA 7203	3	GM 510	AR 60	BX 24
	MA 7204	4	GM 511	AR 60	BX 24
	MA 7205	5	GM 512	AR 60	BX 24
EURO SPRING PINS	MA 7243	3	GM 510	AR 54	BX 24
	MA 7244	4	GM 511	AR 54	BX 24
	MA 7245	5	GM 512	AR 54	BX 24
EURO-SAF SPRING PINS 3 CONTACTS	MA 7263	3	GM 510	AR 5	BX 68
	MA 7264	4	GM 511	AR 5	BX 68
	MA 7265	5	GM 512	AR 5	BX 68

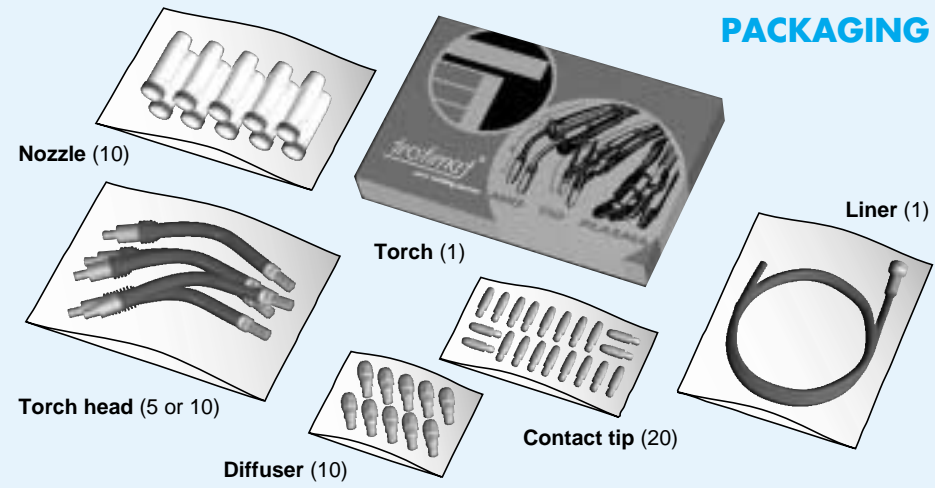

**ERGOPLUS**

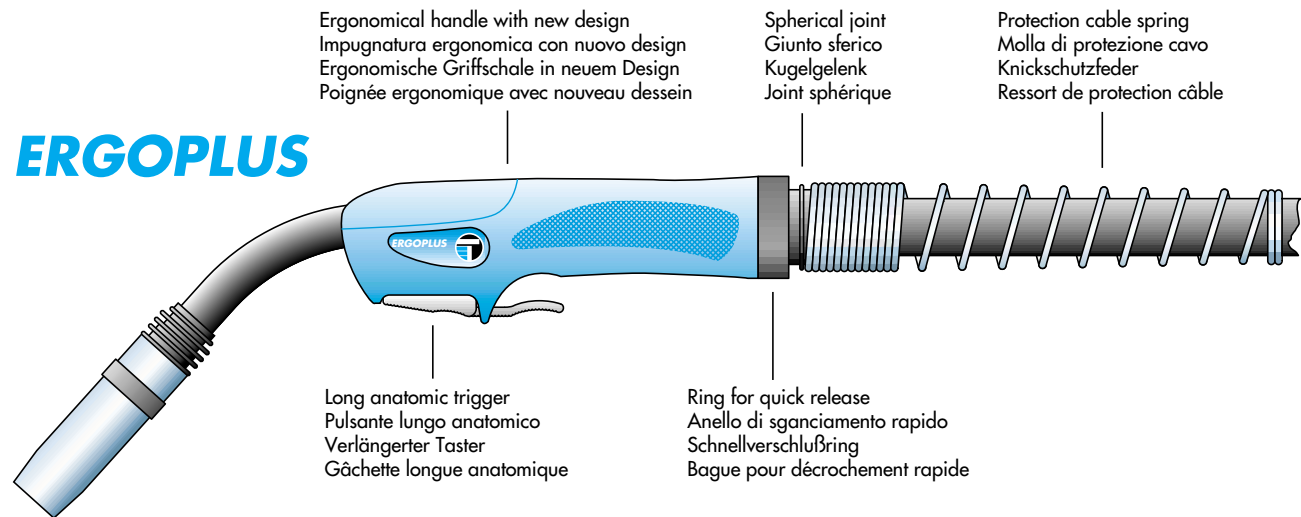

Ergonomical handle with new design  
Impugnatura ergonomica con nuovo design  
Ergonomische Griffschale in neuem Design  
Poignée ergonomique avec nouveau dessein

Spherical joint  
Giunto sferico  
Kugelgelenk  
Joint sphérique

Protection cable spring  
Molla di protezione cavo  
Knickschutzfeder  
Ressort de protection câble

Long anatomic trigger  
Pulsante lungo anatomico  
Verlängerter Taster  
Gâchette longue anatomique

Ring for quick release  
Anello di sganciamento rapido  
Schnellverschlussring  
Bague pour décrochement rapide




**trafimet**®

your welding partner

TRAFIMET spa claim that all items on this catalogue are manufactured in conformity with the "low voltage" CE 73/23 directive as per EN 60974-7 standard. The company reserve the right to modify any products without notice. TRAFIMET spa is the registered owner of all trademarks, patents and models.

Copyright © 1997 Trafimet Spa. All rights reserved. Print date 10/00

EA 0502



**ERGOPLUS 25**


**MIG TORCHES**

**trafimet**®

your welding partner

PLUS HANDLE


MP 36 Black

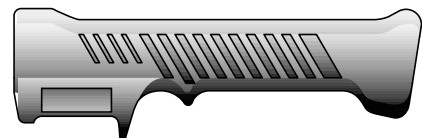

BX 20 BX 67 Microswitch


ERGOPLUS HANDLE

MP 133 Black  
MP 134 Red  
MP 135 Blue • Standard

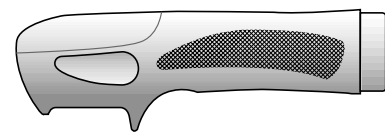

BX 24 • Standard BX 68 Microswitch




ME 16 L = 35 • Standard  
ME 60 L = 37



M6  
28  
MD 9-08 Ø 0.8  
MD 9-09 Ø 0.9  
MD 9-10 Ø 1.0 • Standard  
MD 9-12 Ø 1.2

ALUMINIUM  
MD 9-58 Ø 0.8  
MD 9-60 Ø 1.0  
MD 9-62 Ø 1.2



CuCrZr  
MD 9-78 Ø 0.8  
MD 9-80 Ø 1.0  
MD 9-82 Ø 1.2

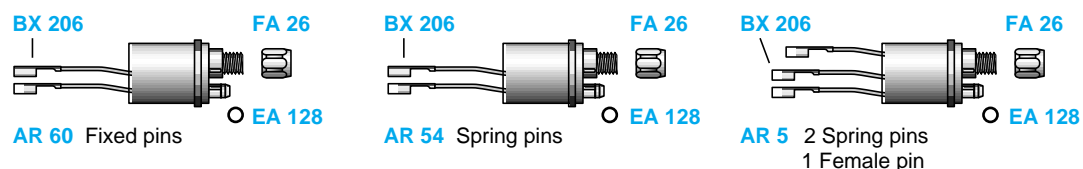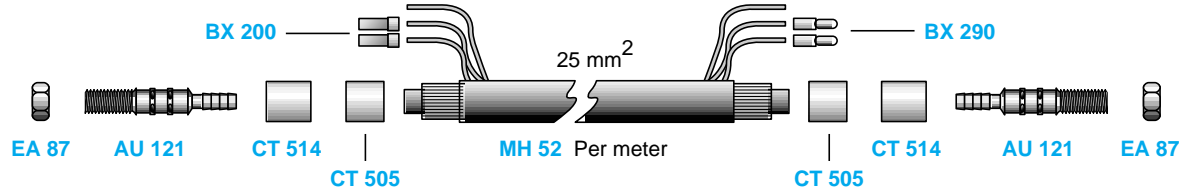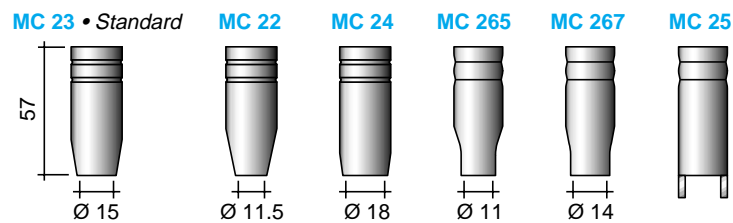

STEEL TEFLON

Blue (wire 0.6 ÷ 0.9)		Special liners for aluminium with GM 240 liner included		
m	GM 500	GM 600	GM 710	
3	GM 500	GM 600	GM 710	
4	GM 501	GM 601	GM 711	
5	GM 502	GM 602	GM 712	
Red (wire 1.0 ÷ 1.2)		(wire 1.0 ÷ 1.2)		
m	GM 510	GM 610	GM 715	GM 720
3	GM 510	GM 610	GM 715	GM 720
4	GM 511	GM 611	GM 716	GM 721
5	GM 512	GM 612	GM 717	GM 722

TEFLON TEFLON-GRAPHITE CARBON

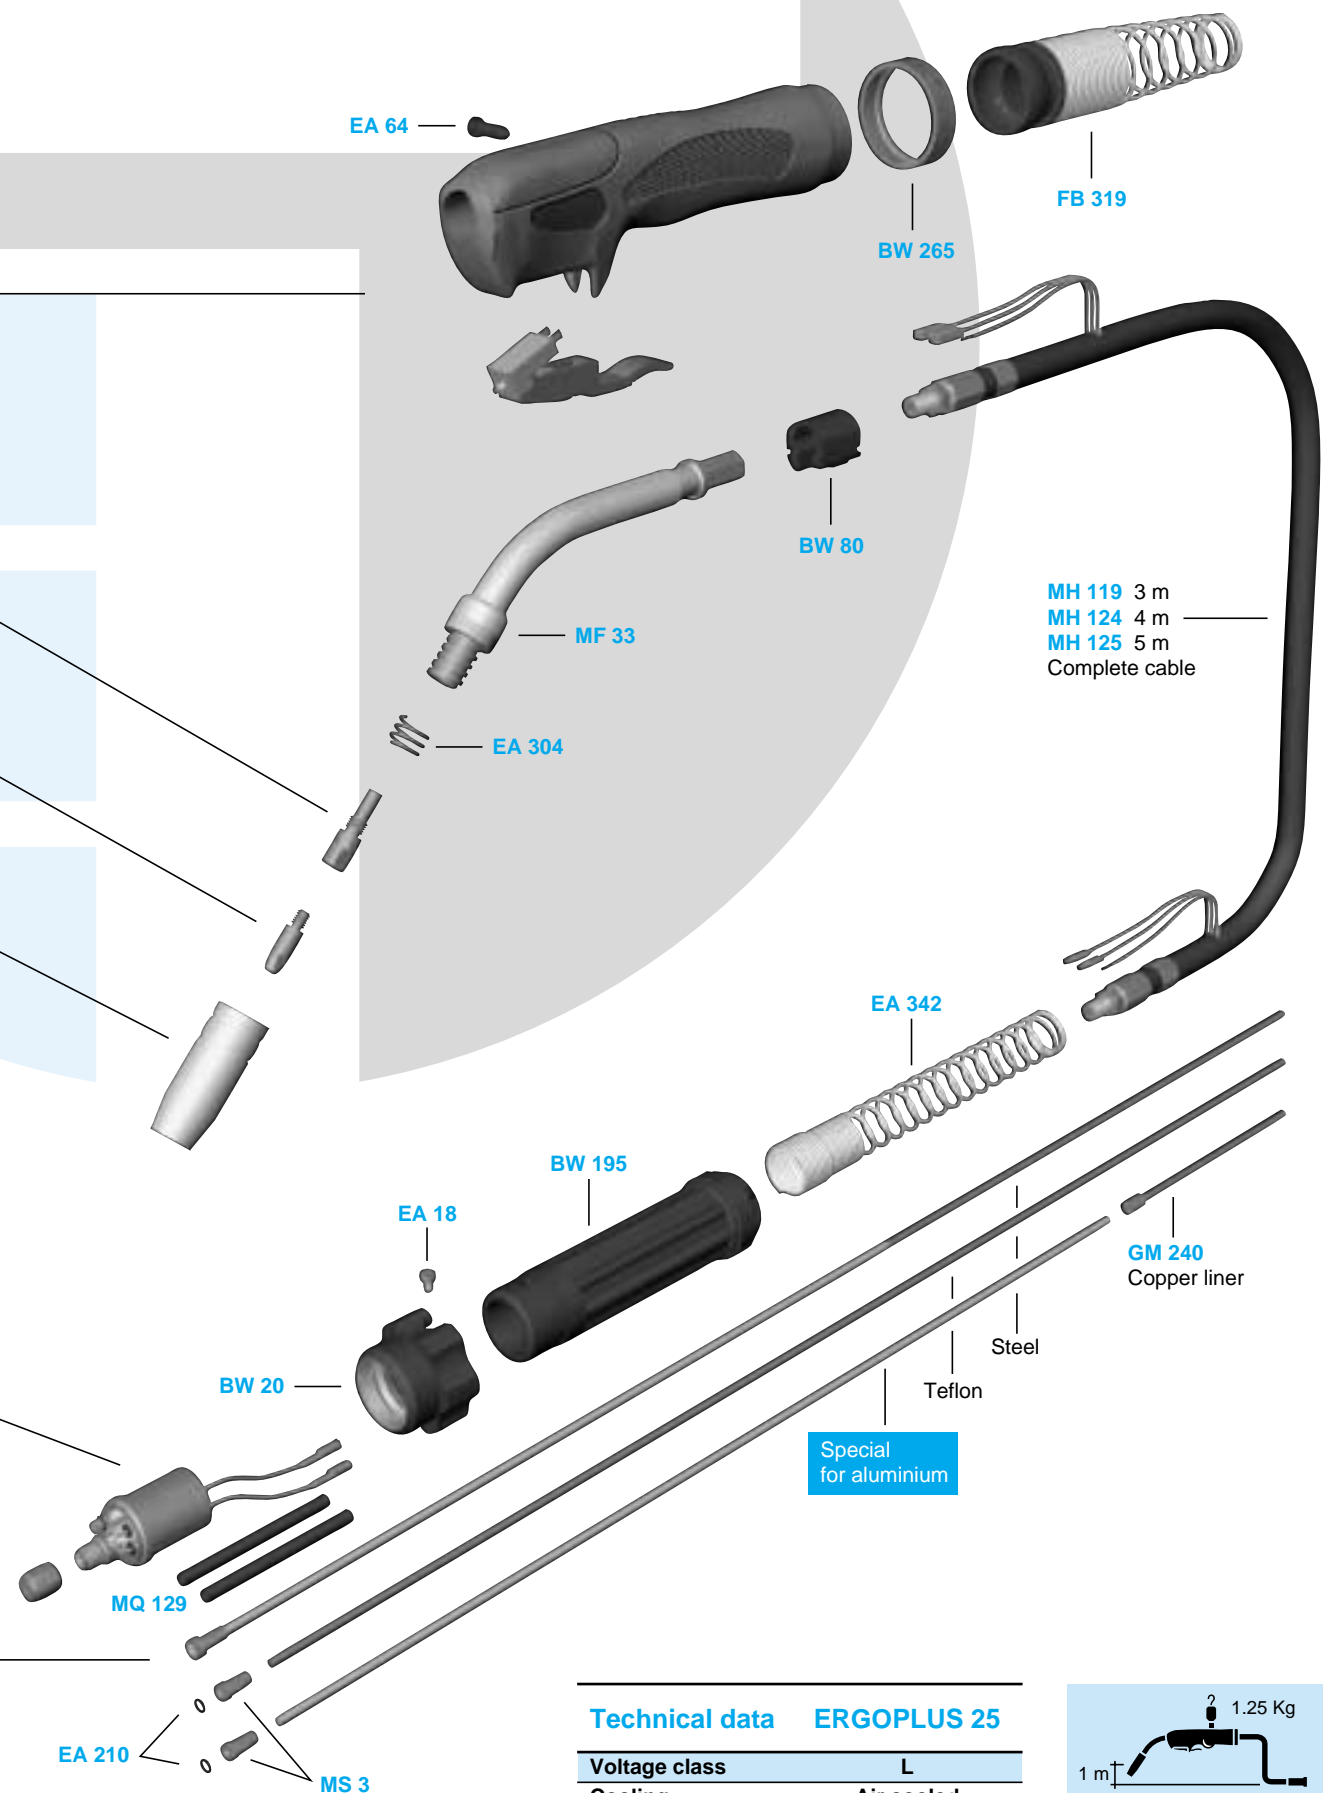

Technical data ERGOPLUS 25	
Voltage class	L
Cooling	Air cooled
Wire Ø mm	0.8 • 0.9 • 1.0 • 1.2
Duty cycle 60%	230A CO <sub>2</sub> • 200A Mix

