



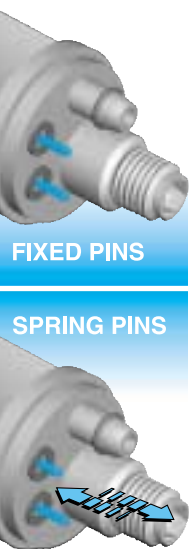


PACKAGING

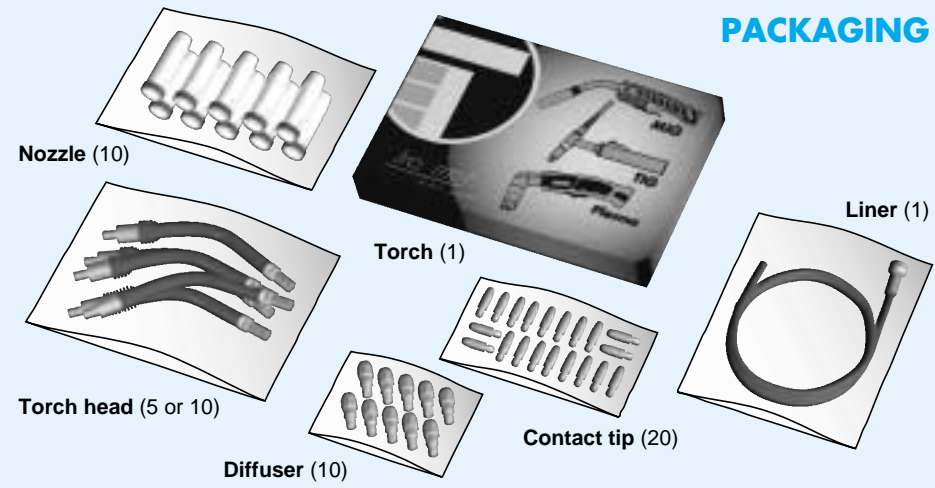

PLUS 600	m	Liner	Adaptor
MB 0300	3	GM 540	AR 101
MB 0301	4	GM 541	AR 101
MB 0302	5	GM 542	AR 101
MB 2300	3	GM 540	AR 102
MB 2301	4	GM 541	AR 102
MB 2302	5	GM 542	AR 102

Water cooling layout for the PLUS 600 torch

Patented by TRAFIMET

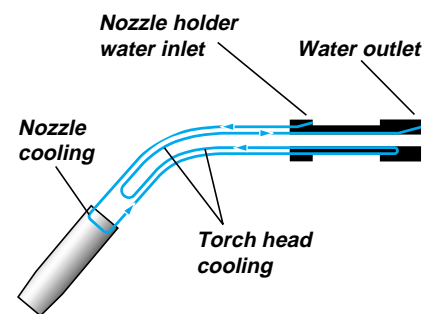

- Wire conduit**
 - QB 90 3 m
 - QB 91 4 m
 - QB 92 5 m
- Control leads**
 - BX 156 3 m
 - BX 157 4 m
 - BX 158 5 m
- Water inlet hose**
 - QB 76 3 m
 - QB 77 4 m
 - QB 78 5 m
- Water and power cable**
 - QA 19 3 m
 - QA 20 4 m
 - QA 21 5 m
- Cable assembly cover**
 - MQ 205 3 m
 - MQ 206 4 m
 - MQ 207 5 m



PLUS 600

MIG TORCHES





trafimet
your welding partner

TRAFIMET spa states that product indicated on this catalogue is manufactured in conformity with the "low voltage" directive CE 73/23 as expected on standard EN 50078. We reserve the right to modify, without notice, any of our products. TRAFIMET spa is the registered owner of all trademarks patents and models. Copyright © April 1997 • by TRAFIMET spa (Print 10/97) EA 0509





EN 50078

trafimet
your welding partner

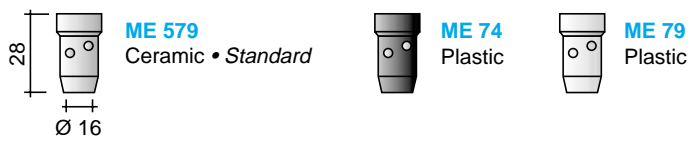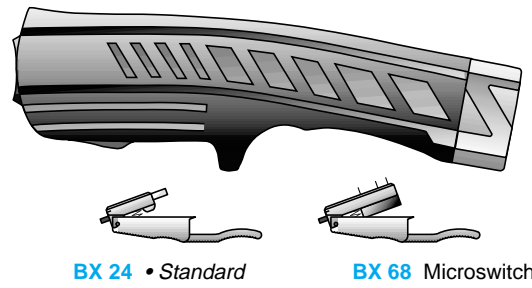


M6 28 Ø 8	MD 9-08 Ø 0.8	MD 9-58 Ø 0.8	ALUMINIUM	M8 30 Ø 10	MD 5-08 Ø 0.8	MD 5-60 Ø 1.0	ALUMINIUM
	MD 9-09 Ø 0.9	MD 9-60 Ø 1.0			MD 5-10 Ø 1.0	MD 5-62 Ø 1.2	
	MD 9-10 Ø 1.0	MD 9-62 Ø 1.2			MD 5-12 Ø 1.2 • Standard	MD 5-66 Ø 1.6	
	MD 9-12 Ø 1.2	MD 9-66 Ø 1.6			MD 5-14 Ø 1.4		
	MD 9-16 Ø 1.6				MD 5-16 Ø 1.6	MD 5-80 Ø 1.0	CuCrZr
		MD 9-78 Ø 0.8	CuCrZr		MD 5-20 Ø 2.0	MD 5-82 Ø 1.2	
		MD 9-80 Ø 1.0			MD 5-24 Ø 2.4	MD 5-86 Ø 1.6	
		MD 9-82 Ø 1.2					

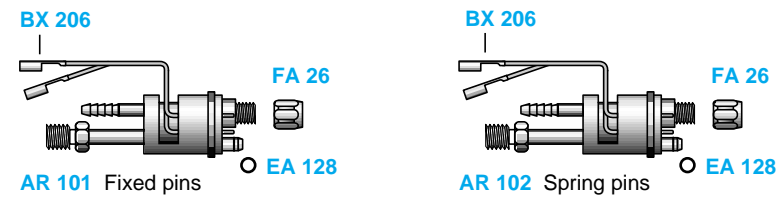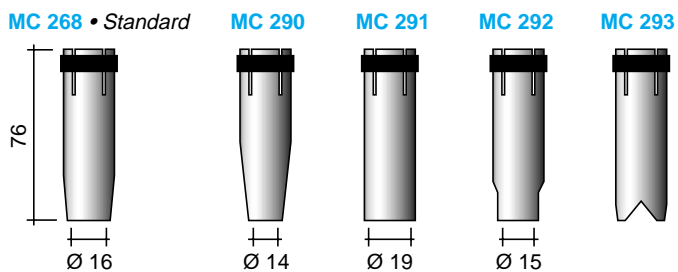

m	Red (wire 1.0 + 1.2)	Yellow (wire 1.2 + 1.6)	Grey (wire 1.6 + 2.4)
3	GM 510	GM 540	GM 574
4	GM 511	GM 541	GM 575
5	GM 512	GM 542	GM 576
3	GM 610	GM 760	-
4	GM 611	GM 761	-
5	GM 612	GM 762	-

STEEL

TEFLON

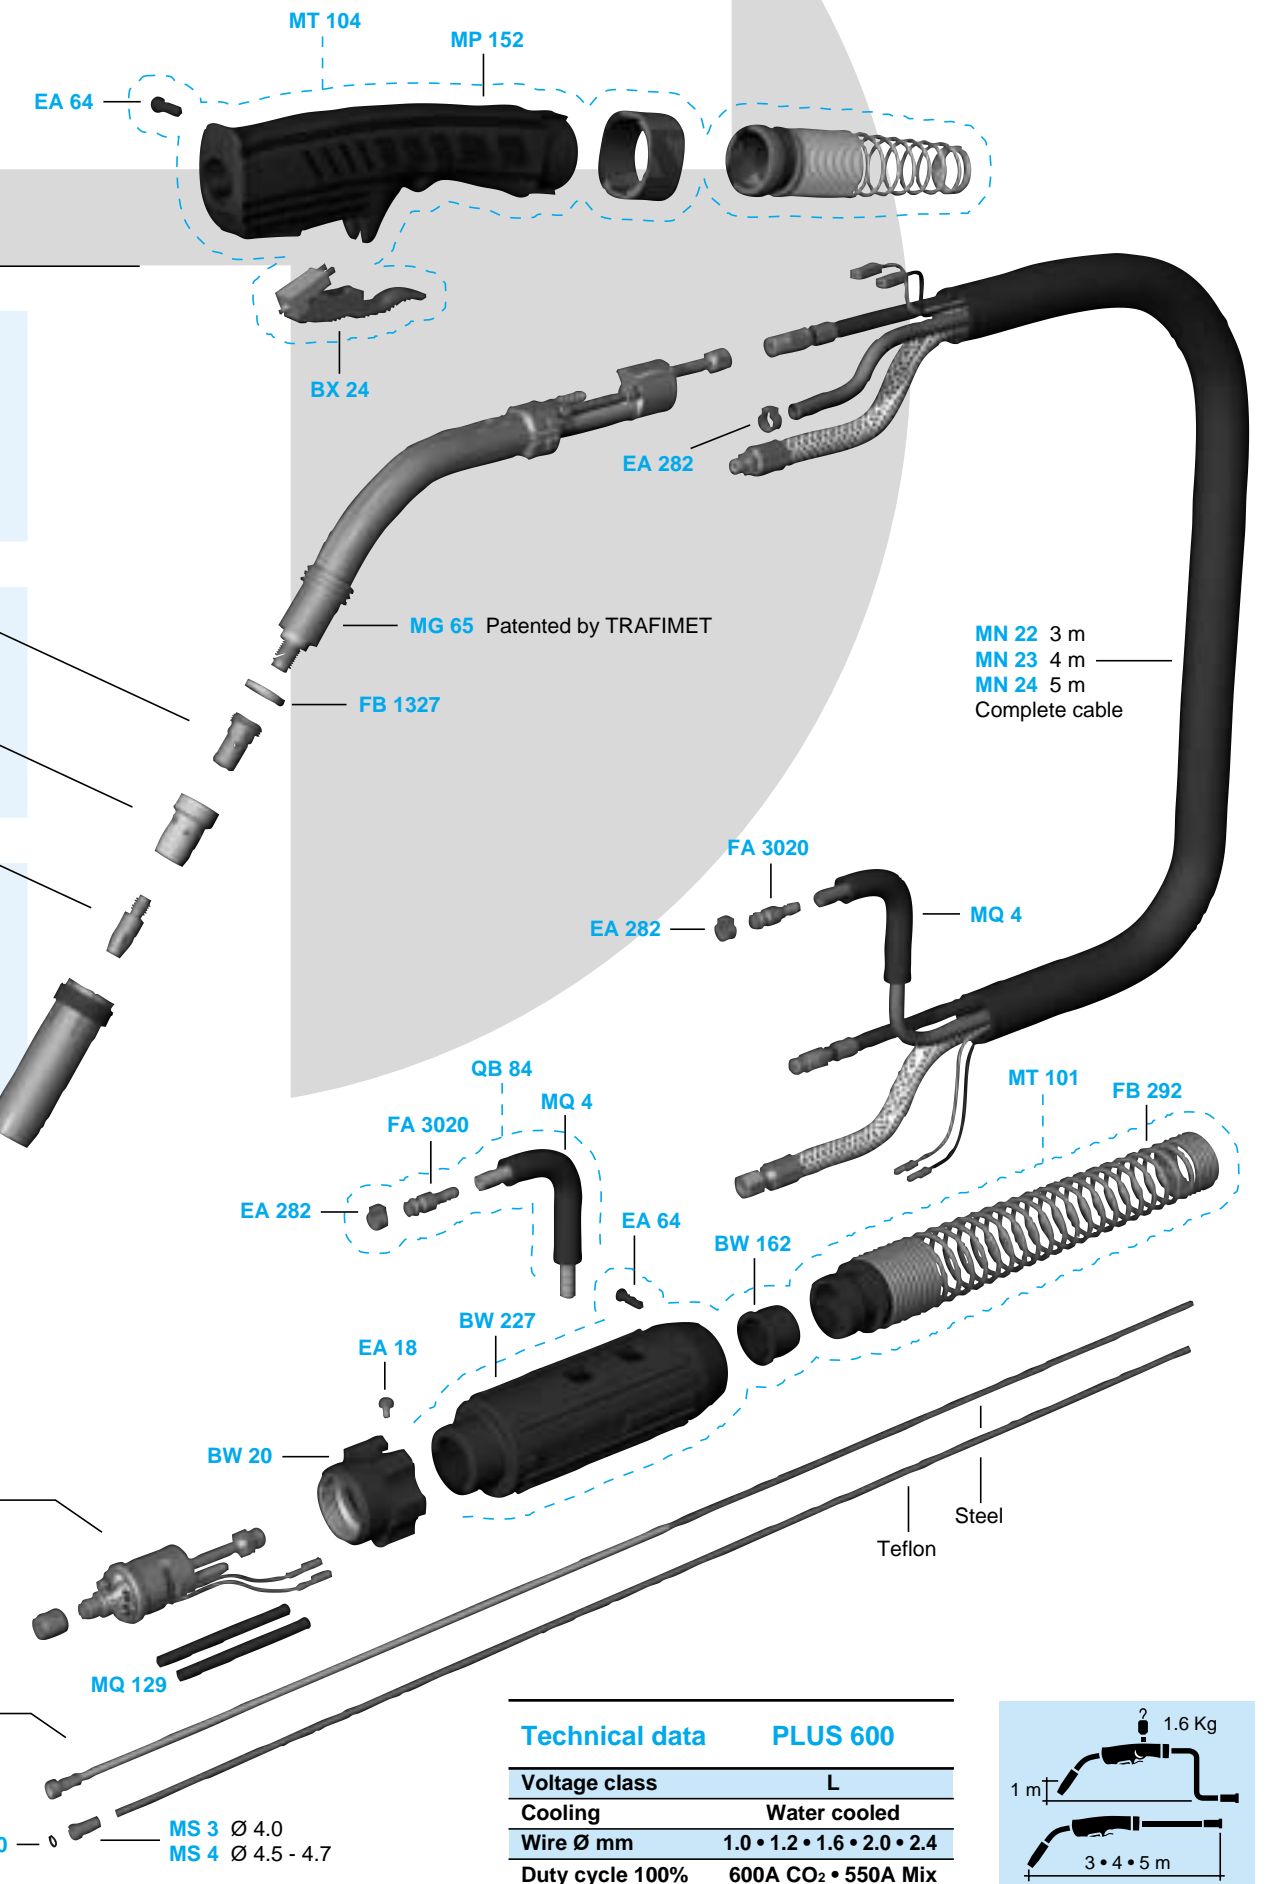

Technical data	PLUS 600
Voltage class	L
Cooling	Water cooled
Wire Ø mm	1.0 • 1.2 • 1.6 • 2.0 • 2.4
Duty cycle 100%	600A CO ₂ • 550A Mix

