




PACKAGING

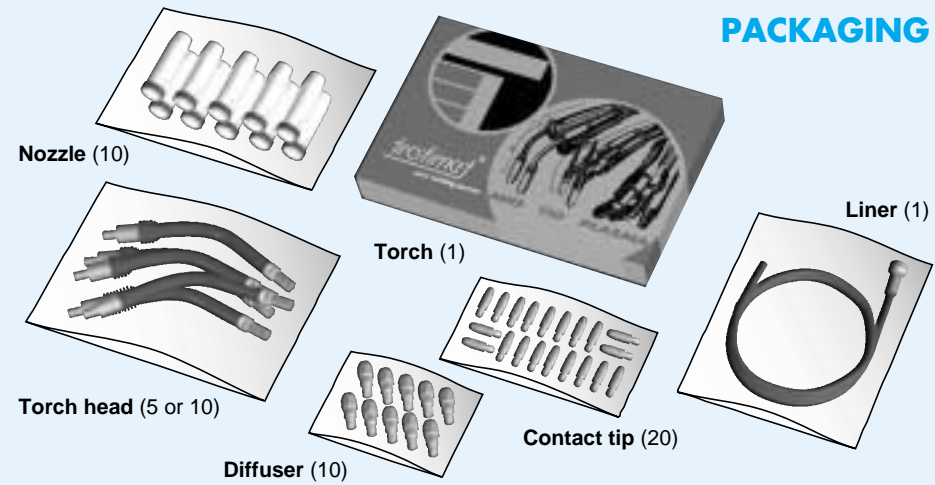

Nozzle (10)

Torch (1)

Liner (1)

Torch head (5 or 10)

Diffuser (10)

Contact tip (20)



	ERGOPLUS 36	m	Liner	Adaptor	Trigger
EURO FIXED PINS	MA 7403	3	GM 540	AR 60	BX 24
	MA 7404	4	GM 541	AR 60	BX 24
	MA 7405	5	GM 542	AR 60	BX 24
EURO SPRING PINS	MA 7443	3	GM 540	AR 54	BX 24
	MA 7444	4	GM 541	AR 54	BX 24
	MA 7445	5	GM 542	AR 54	BX 24
EURO-SAF SPRING PINS 3 CONTACTS	MA 7463	3	GM 540	AR 5	BX 68
	MA 7464	4	GM 541	AR 5	BX 68
	MA 7465	5	GM 542	AR 5	BX 68




Ergonomical handle with new design
Impugnatura ergonomica con nuovo design
Ergonomische Griffschale in neuem Design
Poignée ergonomique avec nouveau dessein

Spherical joint
Giunto sferico
Kugelgelenk
Joint sphérique


Protection cable spring
Molla di protezione cavo
Knickschutzfeder
Ressort de protection câble

ERGOPLUS

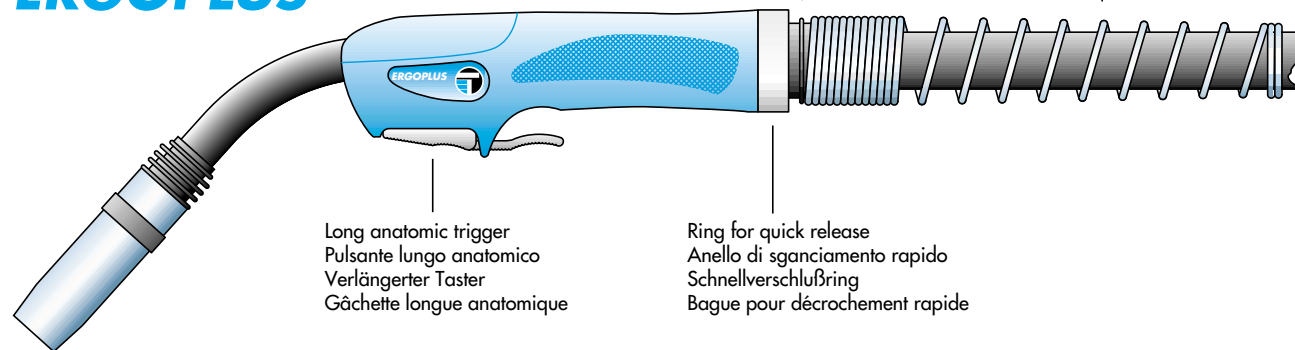

Long anatomic trigger
Pulsante lungo anatomico
Verlängerter Taster
Gâchette longue anatomique

Ring for quick release
Anello di sganciamento rapido
Schnellverschlussring
Bague pour décrochement rapide



ERGOPLUS 36

MIG TORCHES



trafimet®

your welding partner











TRAFIMET spa claim that all items on this catalogue are manufactured in conformity with the "low voltage" CE 73/23 directive as per EN 60974-7 standard. The company reserve the right to modify any products without notice. TRAFIMET spa is the registered owner of all trademarks, patents and models.

Copyright © 1997 Trafimet Spa. All rights reserved. Print date 06/00



EA 0504

trafimet®

your welding partner

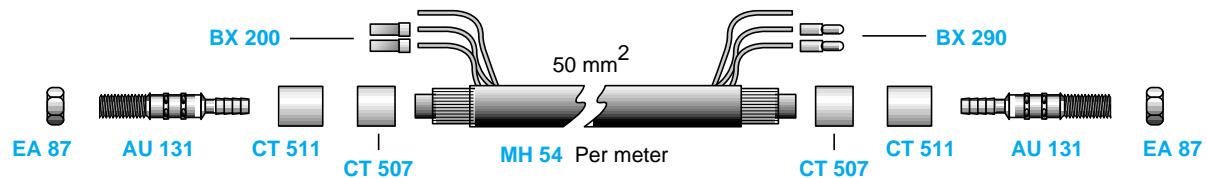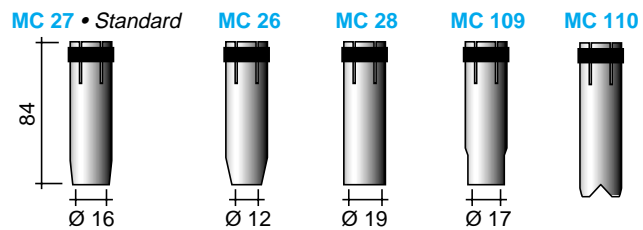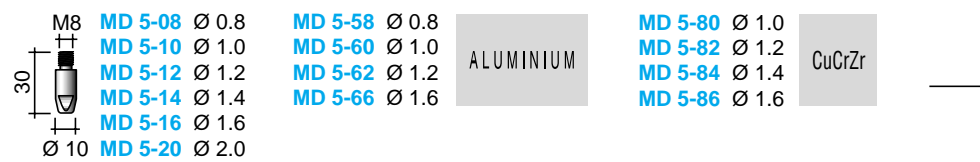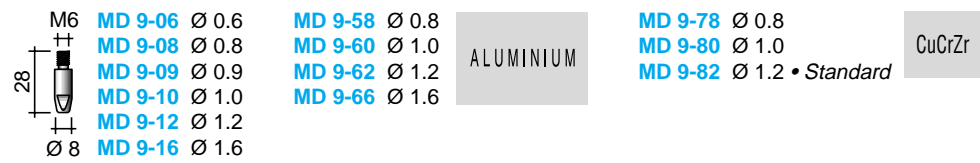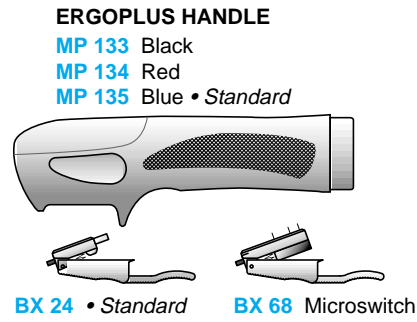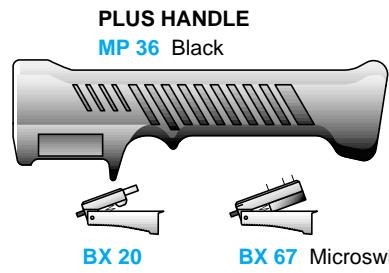

		Special liners for aluminium with GM 240 liner included		
		STEEL TEFLON	TEFLON	TEFLON-GRAPHITE CARBON
m		Blue (wire 0.6 + 0.9)		
3	GM 500	GM 600	GM 710	
4	GM 501	GM 601	GM 711	
5	GM 502	GM 602	GM 712	
m		Red (wire 1.0 + 1.2)		
3	GM 510	GM 610	GM 715	GM 720 GM 725
4	GM 511	GM 611	GM 716	GM 721 GM 726
5	GM 512	GM 612	GM 717	GM 722 GM 727
m		Yellow (wire 1.2 + 1.6)		
3	GM 540	GM 760		
4	GM 541	GM 761		
5	GM 542	GM 762		

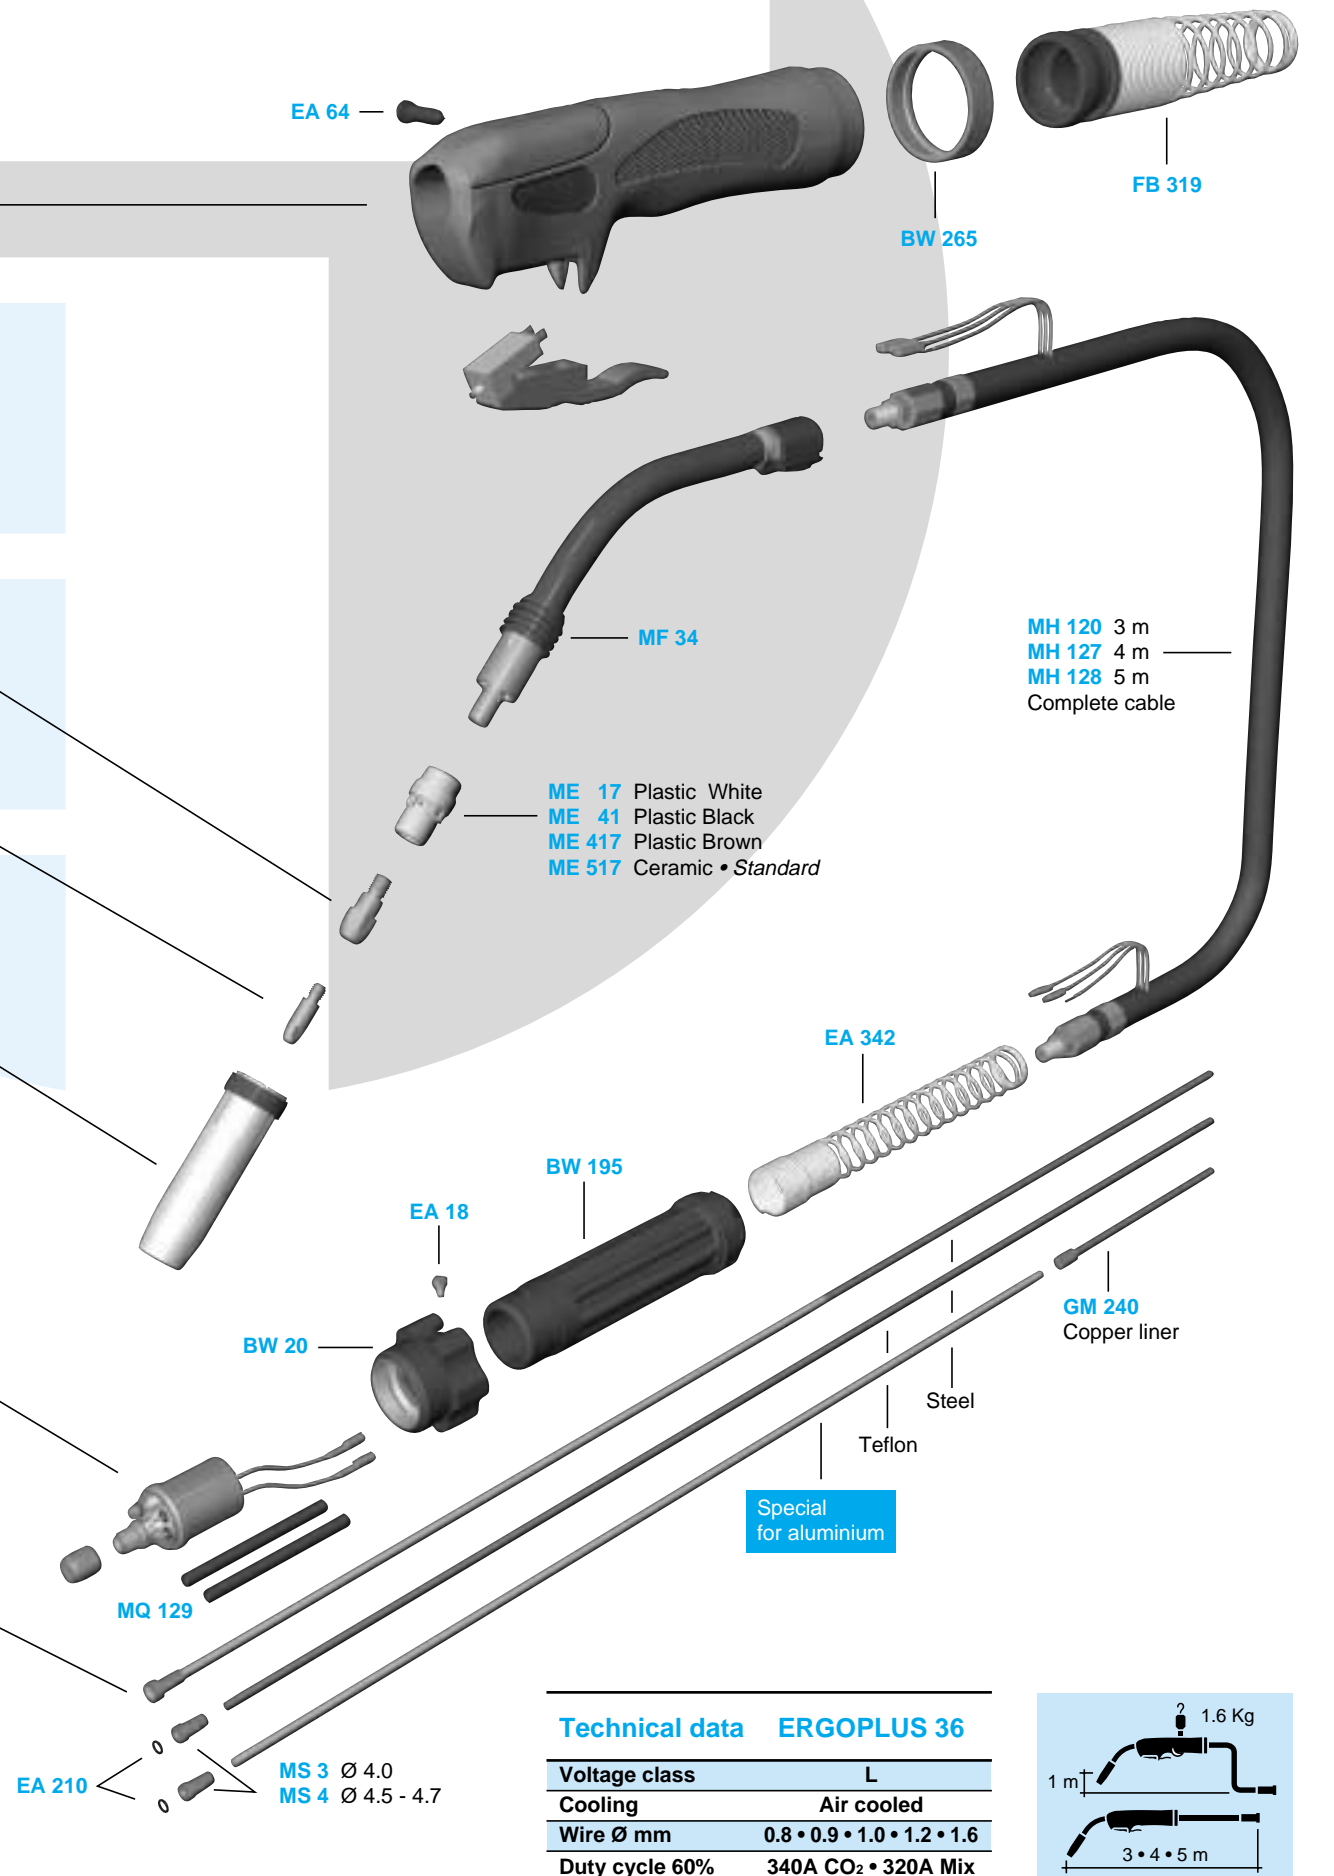

Technical data ERGOPLUS 36

Voltage class	L
Cooling	Air cooled
Wire Ø mm	0.8 • 0.9 • 1.0 • 1.2 • 1.6
Duty cycle 60%	340A CO ₂ • 320A Mix

